

• QUICK CONNECT •

PRO-Fit™ Quick Connect
Push-to-Connect Refrigerant Fittings
Available ONLY from **FSW**

PRO-Fit™ Push to Connect Refrigerant Pipe Connectors
Joints pipe in seconds !

Approved for
Hydrocarbon
Refrigerants



NO BRAZING!
NO OFN PURGING!
NO HOT WORKS!

NEW



- Easy push-in connection
- Quick-release removal
- Airtight double O-ring seal
- Available in 1/4" 3/8" 1/2" 5/8" 3/4" & 7/8"
- Suitable for A2L & Hydrocarbons
- Flame FREE! Tool FREE Problem FREE!

Sight window for
connection verification



PRO-Fit™

• QUICK CONNECT •

PRO-Fit™ Quick Connect

Push-to-Connect Refrigerant Fittings
Available ONLY from FSW

1/4" - 5/8" Support Kit



1/4" - 5/8" Connectors


CODE	SIZE	DESCRIPTION	PK QTY
B8200	1/4"	PRO-Fit™ Connector	1
B8201	3/8"	PRO-Fit™ Connector	1
B8202	1/2"	PRO-Fit™ Connector	1
B8203	5/8"	PRO-Fit™ Connector	1
B8205	3/4"	PRO-Fit™ Connector	1
B8206	7/8"	PRO-Fit™ Connector	1
B8204	1/4" - 5/8"	1/4" - 5/8" Support Kit	1
B8207	3/4" - 7/8"	3/4" - 7/8" Support Kit	1

The 1/4 - 5/8" Support kit includes pipe depth gauge and 4 horseshoes to enable removal of fittings. The 3/4" - 7/8" support kit horseshoes have built in depth gauges on the back of each horseshoe*.

PRO-Fit™

• QUICK CONNECT •

3/4" & 7/8" Connectors

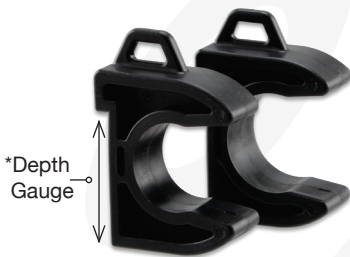

3/4" & 7/8" Support Kit



PRO-Fit™ Quick Connectors available from our on-line shop for next working day delivery www.fsw.uk.com or instore at any one of our 24 trade UK counters. Further details email sales@fsw.uk.com

FEATURES

- Quick & easy push fit connection
- Flame free: No Brazing or Flaring
- Quick release via optional removal tool.
- Robust brass body, durable and reliable.
- Leak-proof double O-Ring seal
- High tensile strength
- Vibration & impact resistant
- UV & Corrosion resistant
- Sight window for connection verification

APPLICATIONS

- Perfect for AC units, split and VRV/VRF & refrigeration systems
- Ideal for brazing stubs on compressor in workshop then using quick connect fittings on site avoiding any hot works.
- Practical solution when confronted with hot works issue.

SPECIFICATIONS

- Suitable for all HFC, HFO, A2L & A3 refrigerants
- MWP: 870 psig (60bar)
- Temp Range: -40°C to 120°C
- Vacuum Rating: 30 Microns
- Suitable for soft and half hard copper 1/4" 3/8" 1/2" 5/8"

*PLEASE NOTE: Not suitable for CO₂

